

SITALI SF 150 S1

Compatible with:
SIOS
CONTROL

Decentralized Controlled Mechanical Ventilation with alternate single flow and heat recovery



SILENT FUNCTION

The most silent: only **10-dB (A)** Optimized for continuous 24/24h operation.



INTELLIGENT FUNCTION

Thanks to the presence of the temperature detection probe, the air flow inversion time is self-adjusted to allow the best comfort indoors.



MAGNETIC FUNCTION


Quick release via magnets for easy maintenance without the need for specialized staff.



FEATURES

- Temperature probe that adjusts the air flow inversion times to maintain the indoor comfort level
- Energy class: **A**
- EC brushless motor
- Integrated humidity sensor
- Easy maintenance, indoor magnetic release
- Infra-red remote control with LCD
- Double filter on the inner/outer side of the exchanger
- Multicolor LED indicator
- 5 ventilation speeds available
- Magnetic wall support for remote control
- ON/OFF contact

DIMENSIONS AND TECHNICAL SPECIFICATIONS

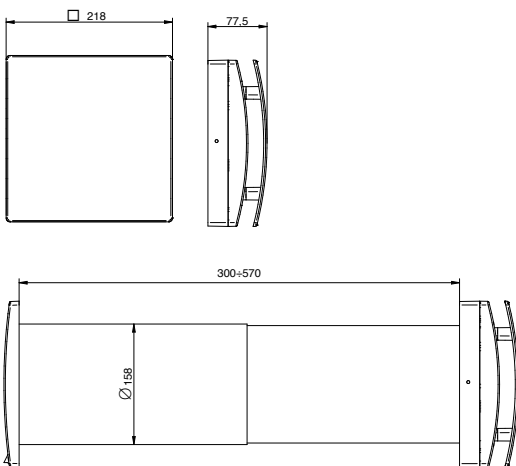

TECHNICAL DATA	SF 150 S1
PRODUCT CODE	99299
Hole diameter mm	160
Energy class	A
Air flow rate m ³ /h	60/50/40/30/20
Sound level* dB(A)	29/24/20/14/10
Absorption W	6/4,5/3,5/2,5/2
Max. thermal	82%
Max room temperature °C	-20°C +50°C
Weight kg	5,5
Degree of protection IP	IPX4
M ² treated** m ²	20 m ²

220-240 V ~ 50-60Hz aerualic performance measured according to ISO 5801 at 230V 50Hz, air density 1.2 Kg/m³ - data measured in TÜV Rheinland accredited laboratory

* sound pressure level at 3m in free field

**Maximum treated area for civil dwellings (regulatory reference UNI 10339:1995) considering 30 m³/h as the maximum flow rate, being of alternate flow.

